




HF104 Compression Driver

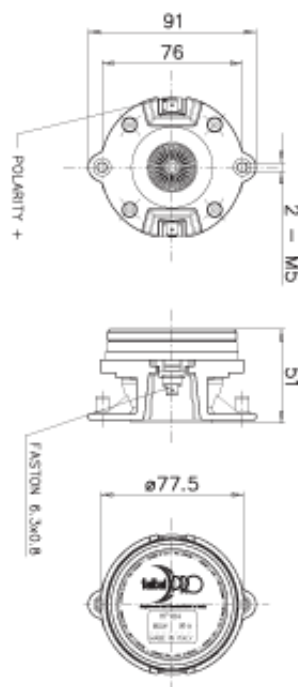

NOMINAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Overall Diameter	91 mm (3.58 in)
180° Mounting Holes Diameter (2xM5)	77.5 mm (3.05 in)
Depth	51 mm (2.01 in)
Net Weight	850 g (1.87 lb)
Shipping Box	98x90x64 mm (3.86x3.54x2.52 in)
Shipping Weight	880 g (1.94 lb)

TECHNICAL PARAMETERS

Nominal Impedance	8 ohm
Minimum Impedance	6.9 ohm
AES Power Handling *	40 W
Maximum Power Handling **	80 W
Minimum Crossover Frequency ***	1.7 kHz
Sensitivity (1W/1m) ****	108 dB
Frequency Range	1÷20 kHz
Voice Coil Diameter	37 mm (1.46 in)
Winding Material	Copper Clad Aluminium
Former Material	Kapton
Diaphragm Material	Ketone Polymer
Diaphragm Shape	Annular
Winding Depth	2.1 mm (0.08 in)
Magnetic Gap Depth	2.6 mm (0.10 in)
Flux Density	1.85 T
Re	5.5 ohm
Phase Plug Design	Radial

NOTES

(*) Test made for 2 hours with Pink Noise signal (6 dB Crest Factor) from minimum crossover frequency. Power calculated on rated minimum impedance. Driver mounted on aluminium horn.

(**) Maximum power is defined as 3dB greater than nominal power.

(**) 12 dB/oct or higher slope high-pass filter

(****) Averaged within the frequency range

CURVES

