



## 8 K 3 PL 8Ω

Professional

8" | 800 W

Code Z005520

- SNDW** 3" Sandwich voice coil Fiberglass former and Aluminium Winding
- PS** Konex Spider with Progressive Waves
- DAR** Cloth surround with Double Asymmetric Rolls Technology (DAR)
- AWpT** Autoclave Waterproof Cone Treatment
- CDR** Neodymium Magnet Circuit with Copper Demodulating Ring
- VMVc** Ventilated Magnet and Voice Coil to reduce Power Compression
- 95.1 dB sensitivity
- Frequency Range 65-3000 Hz

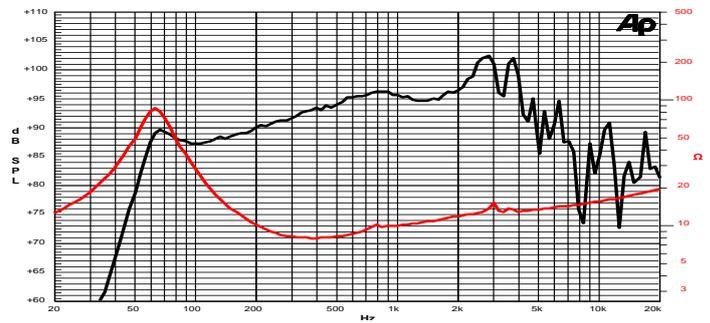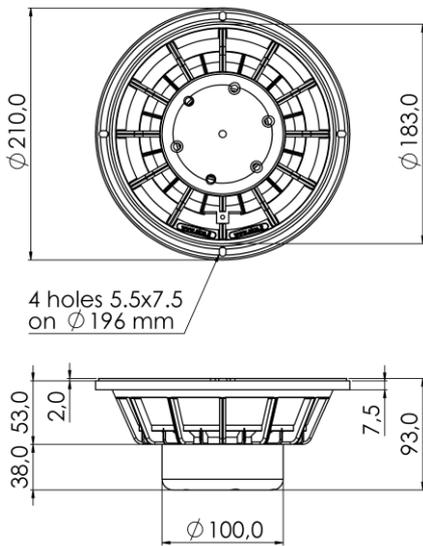

Frequency Response on 25 Lt @ 65 Hz Vented Box @ 1W, 1m  
Free Air Impedance

### General Specifications

Nominal Diameter	210 mm (8")
Nominal Impedance	8 Ω
Rated Power AES <sup>(1)</sup>	400 W
Continuous Program Power <sup>(2)</sup>	800 W
Sensitivity @ 1W/1m <sup>(3)</sup>	95.1 dB
Voice Coil Diameter	75 mm (3")
Voice Coil Winding Depth	17 mm
Magnetic Gap Depth	10 mm
Flux Density	1.20 T
Magnet Weight	360 g
Net Weight	2.4 kg

### Thiele & Small Parameters <sup>(4)</sup>

$R_e$	5.6 Ω	$F_s$	68.1 Hz
$Q_{ms}$	3.85	$Q_{es}$	0.27
$Q_{ts}$	0.25	$M_{ms}$	29.0 g
$C_{ms}$	188 μm/N	$B_{xl}$	16.10 Tm
$V_{as}$	12.2 l	$S_d$	213.8 cm <sup>2</sup>
$X_{max}^{(5)}$	+/-5.0 mm	$X_{var}^{(6)}$	+/-6.5 mm
$\eta_0$	1.38 %	$L_e$ (1kHz)	0.37 mH

### Constructive Characteristics

Magnet	Neodymium
Basket Material	Aluminium Die-Cast
Voice Coil Winding Material	Aluminium
Voice Coil Former Material	Fiberglass
Cone Material	Paper
Cone Treatment	Humidity Resistant Pulp
Surround Material	Treated Cloth
Dust Dome Material	Solid Paper

### Mounting Information

Overall Diameter	210 mm
Baffle Cutout Diameter	184 mm
Mounting Holes	4 holes 5,5x7,5 on ø196 mm
Total Depth	93 mm

<sup>(1)</sup> Rated Power measured with 2-hour test with pink noise signal, 6dB crest factor, loudspeaker in free air, power calculated on rated Zmin. <sup>(2)</sup> Power on Continuous Program is defined as 3dB greater than the Rated Power. <sup>(3)</sup> Calculated by Thiele & Small parameters, for SPL average in box refer to frequency response. <sup>(4)</sup> Thiele & Small parameters measured with laser system after preconditioning test. <sup>(5)</sup> Measured with respect to a THD of 10%. <sup>(6)</sup> Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value. <sup>(7)</sup> Drawing dimensions: mm.