

Vintage

## P 12 Q 16Ω **Code ZJ06170** 12" 40W

LOWS: Loose

MIDS: Firm

HIGHS: **Smooth** 

**OVERDRIVE:** Edgy

## **Sound Features:**

## **Guitarist Description:**

Very warm, mid-focused bite with clear, bright highs. When presented with overdrive distortion, it remains well balanced.


Specifications				
Nominal Diameter	306	mm (12")		
Nominal Impedance	16	Ω		
Rated Power AES (1)	40	W		
Continuous Program Power (2)	80	W		
Sensitivity @ 1W/1m	93.1	dB		
Voice Coil Diameter	32	mm		
Voice Coil Winding Depth	8	mm		
Magnetic Gap Depth	6	mm		
Flux Density	0.98	T		
Magnet Weight	300	g		
Net Weight	1.9	kg		

Thiele & Small Parameters (3)				
Re	12.00 Ω	Fs	90.0 Hz	
Qms	12.54	Mms	27.6 g	
Qts	2.49	Bxl	7.76 Tm	
Cms	113 μm/N	Sd	490.9 cm <sup>2</sup>	
Vas	39.0 I	Le (1kHz)	0.60 mH	



Constructive Characteristics			
Magnet	AlNiCo		
Basket Material	Pressed Sheet Steel		
Voice Coil Winding Material	Copper		
Voice Coil Former Material	Nomex		
Cone Material	Paper		
Surround Treatment	No		
Surround Material	Paper - Integrated		
Dust Dome Material	Solid Paper		

n° 8 holes 9 × 6.5 at 45° on Ø 293.5

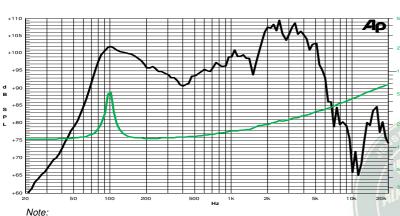

-70.0

- 1 :Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
- 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
- 3: Thiele & Small parameters measured with laser system without preconditioning test
- 4: Drawing dimensions: mm
- 5: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle

30/01/15